

Modelling of a Steady Micropolar Nanofluid flow along a wedge

ABSTRACT

Micropolar fluids are polarized fluids hence have better thermal conductivity properties. The incorporation of nanoparticles into micropolar fluids further enhances their thermal conductivity performance. The gyration characteristic of these fluids is significant in fields such as astrophysics, stellar dynamics, and dynamic theory. Flow along wedge structures has important application in aerodynamics, hydrodynamics heat transfer and industrial processes. Advancements in technology have heightened the development of predictive models for advanced machine tools, including synthetic lubricants and power bearings. This study investigates the steady flow of a micropolar nanofluid over a wedge with a perpendicularly applied magnetic field. By incorporating gyration and inertial effects into the Navier-Stokes equations, the flow is modeled and converted to ordinary differential equations through similarity transformation. Then solved numerically by Fourth-Order Runge-Kutta method, in combination with the shooting technique and the bvp5c solver in MATLAB.

Results reveal that increase in magnetic and micropolar parameters reduces the fluid velocity due to higher rotational viscosity, however, micropolar effects increases the temperature, solute concentration, energy and mass transfer. Additionally, a large wedge angle parameter boosts the skin friction, fluid velocity and enhances mass heat and mass transfer regardless of the magnetic field strength.

The findings of this study will help in thin film lubrication, which is crucial in the designing of chemical processing equipment, coolants, and heat exchangers in engineering applications.

1.0 INTRODUCTION

Heat and mass transfer in fluids has a wide application in industrial and chemical processes. Due to this, several researchers developed interest in understanding and finally improving the industrial processes. This has helped in designing chemical processing equipment such as the cooling process towers, refrigeration, air conditioning and heat exchangers. Moreover to improve heat transfer, micropolar nanofluids research has been carried out by many researchers because of their application in real life.

The research on micropolar fluids was first put forward by Eringen (1965), who defined micropolar fluids as non-symmetric stress tensors with microscopic characteristics during their movement. He said that their particles show microscopic velocity and atomic gyration within the fluid. Lukasiewicz (1999) extended this work and showed that micropolar fluids have five viscosity coefficients in which the angular momentum effects play a vital role. After this breakthrough, more research has been carried out to increase the knowledge in the area.

Falkner and Skan (1931) approximated the solution of the boundary equations. In their work they investigated the steady laminar flow past a wedge and demonstrated the importance of Prandtl boundary layer theory. They derived the differentiated Falkner-Skan equations by reducing the boundary layer equation. They noted that these equations are composed of non-uniform flows that could be approximated at the wall and take the form ax^m .

Rajagopal et al. (1983) studied the Falkner-Skan flows of non-Newtonian fluids past a uniformly heated wedge through a forced convection. They concluded that forced convection flows in a uniformly and isothermally heated flux for different numbers. Buongiorno (1983) through his model showed that thermophoresis intensity enhances the micropolar nanofluid temperatures. In separate studies Wanateba (1991) and Ishak et al. (2007) analyzed the flow over a wedge in motion with injection and suction using the Keller box technique and came up with the solutions for large values of wedge

parameters. They further stated that despite the results and solution, there is need to consider the heat produced by the working bodies in the micropolar fluid. This gave an insight in the aerodynamics engineering and the hydrodynamics field. Yir (1999) investigated the effect of an induced magnetic current under thermophoresis effect by a non-heated wedge. He concluded that the magnetic field is intense on shear stress but not in a heat transfer rate.

Agarwal et al. (1990) determined the conduction of heat on a micropolar fluid over a porous stationary wall. Kim (1999) analyzed the boundary layer along a wedge with constant surface heat flux. Talukdar (2012) studied the perturbation techniques for unsteady MHD mixed convection periodic heat flow and mass transfer in micropolar fluids with chemical reaction in the presence of thermal radiation. In these studies, the researchers were interested in the heat transfer through a boundary layer defined by the amount of heat injected. However, the conditions failed to work and hence they incorporated the Newtonian heating conditions. From the studies chemical reactions reduces the concentration, velocity and viscous drag of a fluid.

Ishak and Yao (2011) studied the heat conduction as a result of surface convection under different geometrics due to its important application in processes such as transpiration, cooling process and material drying. They concluded that the surface convection parameter is proportional to the surface temperature of the body.

Kuznetsova et al. (2011) showed that micropolar rotation contribute towards development of bio micro system and show a significant aspect in mixing and increasing in mass movement. Rahman Mim (2012) studied the hydromagnetic movement of unsteady bio magnetic fluid along a wedge under convection. He discovered that the magnetic field affects the temperature and gyration of the blood capsule. According to the study heat transfer is directly proportional to the wedge angle but indirectly proportional to the unsteadiness parameter. It was noted that the strong unsteadiness of the fluid usually triggers sanction on the wedge surface.

Scatter (2011) studied a 2D boundary layer flow over a wedge. In the study he established new sets of transformations in finding the local similarity situations. He concluded that separation of the boundary layer may be enhanced by enough unsteadiness in an accelerated flow. These results were used by Rahman et al. (2012) and Hassan (2013) to analyze the heat transfer and their characteristics. In these studies, they concluded that fluid velocity increases with increase in unsteadiness parameter.

Khat et al. (2014) presented the flow of fluids and heat conduction on carbon nanotubes with momentum boundary conditions. They established that the heat conduction in oiled engine carbo nanotubes is faster as compared to kerosene-based carbon nanotubes. Kumar (2017) established the effect of thermophoresis in a conducting micropolar fluid over a wedge. He concluded that the rise of chemical parameters and Schmidt number increases the rate of mass transfer.

Moh'd Rijalet al. (2018) investigated the unsteady linear MHD boundary layer flow over a wedge and concluded that enhancement of the magnetic parameter of a wedge angle and thermal buoyance enhances the fluid flow, while nanoparticles volume fraction decreases the fluid velocity. Zaid et al. (2019) determined the effect of a TiO_2 on a mixed convection flow of micropolar fluid along a wedge. They established that fluid flow is enhanced by microrotation profiles for the first and second solution, but this decreased the nanofluid velocity in the first solution and increased it for the second solution. Zaid et al. (2019) investigated the effect of viscosity, thermal conductivity and the Prandtl number in a mixed convection of a micropolar fluid. They established that multiple solutions can only be obtained for opposable boundary layer flow. Zulkifl et al. (2020) studied the MHD micropolar nanofluid flow along a wedge and concluded that wedge angle m and magnetic parameter are proportional to the fluid velocity.

Chandra and Sudarsana (2020) comparatively analyzed steady and unsteady flow of a Buongiorno's Williamson nanofluid with slip effect and established that increase in wedge angle parameter intensifies the temperature in both steady and unsteady flows.

In this work therefore we shall study the steady flow of a micropolar nanofluid along a wedge using the fourth order Rungekutta method coupled with the shooting technique and the bvp5c solver of the MATLAB.

Mathematical Formulation

In this study, a two-dimensional steady and unsteady flow of a micropolar nanofluid along the surface of a wedge of an angle $\Omega = \pi\beta$ with a uniform surface temperature T_w and a uniform upstream velocity, pressure and temperature shall be considered. The pressure velocity outside the viscous boundary layer varies with distance x along the wedge such that $u_\infty = Cx^m$ as shown in the diagram. The magnetic field $B=B_0x^{\left(\frac{m-1}{2}\right)}$ is applied normal to the x -axis as illustrated in the diagram.

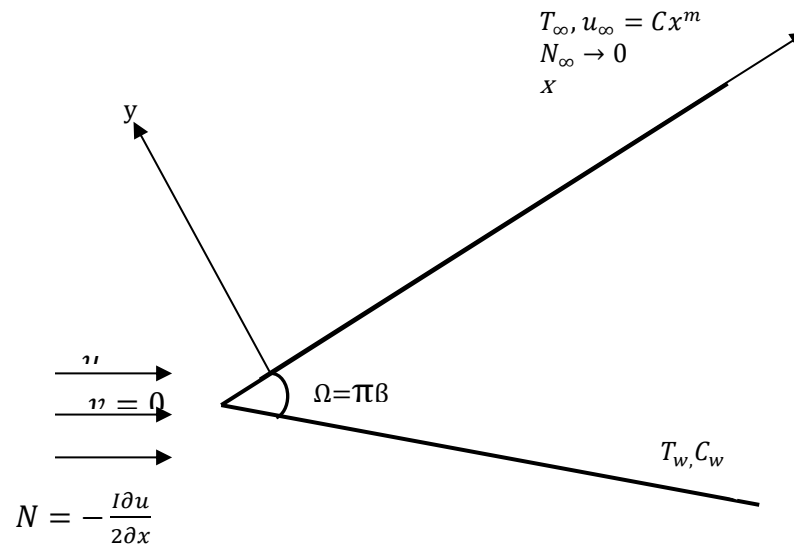


Figure 1: Schematic diagram of the flow

The equations governing the flow are given as:

$$\text{Mass equation} \quad \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (1)$$

Momentum equation

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = u_{\infty} \frac{\partial u_{\infty}}{\partial x} + \left(\frac{\mu + s}{\rho} \right) \frac{\partial^2 u}{\partial y^2} + \frac{s}{\rho} \frac{\partial N}{\partial y} + \frac{\sigma B^2}{\rho} (u_{\infty} - u) \quad (2)$$

$$\text{Microrotation equation} \quad u \frac{\partial N}{\partial x} + v \frac{\partial N}{\partial y} = \left(\frac{\gamma}{j\rho} \right) \frac{\partial^2 N}{\partial y^2} - \left(\frac{s}{j\rho} \right) \left(2N + \frac{\partial u}{\partial y} \right) \quad (3)$$

$$\text{The energy equation} \quad u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \alpha \frac{\partial^2 T}{\partial y^2} + \tau \left(\frac{D_B}{\Delta C} \frac{\partial C}{\partial y} \frac{\partial T}{\partial y} + \frac{D_T}{T_{\infty}} \left(\frac{\partial T}{\partial y} \right)^2 \right) \quad (4)$$

Concentration equation

$$u \frac{\partial C}{\partial x} + v \frac{\partial C}{\partial y} = D_B \frac{\partial^2 C}{\partial y^2} + \frac{D_T \Delta T}{T_{\infty}} \frac{\partial^2 T}{\partial y^2} - kx^{m-1} (C - C_{\infty}) \quad (5)$$

The equations (1 – 5) are subjected to the boundary conditions

$$u = 0, \quad v = 0, \quad N = -\frac{1}{2} \frac{\partial u}{\partial y}, \quad T = T_w = T_0, \quad \frac{D_B}{\Delta C} \frac{\partial C}{\partial y} + \frac{D_T}{T_{\infty}} \frac{\partial T}{\partial y} = 0; \quad \text{for } y = 0$$

$$u \rightarrow u_{\infty} = cx^m, N \rightarrow 0, T \rightarrow T_{\infty}, C \rightarrow C_{\infty}; \quad \text{for } y \rightarrow \infty. \quad (6)$$

Where u and v are the velocities in x and y direction respectively, B is the magnetic current, σ is the Stefan- Boltzman constant and ρ is the density of the micropolar nanofluid, $u_{\infty} = cx^m$ is the stream velocity, N is the microrotation vector normal to $x - y$ plane, T is the temperature of the fluid, T_w is the temperature of the wall, j is microrotation (inertia) density, γ is microrotation constant, D_B is Brownian diffusion coefficient, s is the vortex viscosity, ρ is the density of the micropolar fluid, μ is the dynamic viscosity, C is the ambient concentration at any reference point, C_w is variable concentration, k Conductivity of the fluid and τ is the ratio of the effective heat capacity of the base fluid to the effective heat capacity of the micropolar fluid.

Non-dimesionalization of governing equations

Defining the velocity component in terms of the stream function $\psi = \psi(x, y)$ and

Letting $u = \frac{\partial \psi}{\partial y}$ and $v = -\frac{\partial \psi}{\partial x}$ with the similarity variable,

$$\eta = \left(\frac{c}{\vartheta}\right)^{\frac{1}{2}} x^{(m-1)/2} y, \quad \psi = (c\vartheta)^{\frac{1}{2}} x^{(m+1)/2} f(\eta), \quad N = \left(\frac{c^3}{\vartheta}\right)^{\frac{1}{2}} x^{\frac{3m-1}{2}} g(\eta),$$

$$T = T_{\infty} + \Delta T \cdot \Theta, \quad C = C_{\infty} + \Delta C \cdot \Phi \quad (7)$$

where ψ is the stream function, θ is the dimensionless temperature, N is the microrotation velocity and ϕ is the dimensionless nanofluid concentration.

The steady equations are (1 – 5) subjected to the boundary conditions (6), with the similarity variable, (7) are non-dimensionalized into the equations

Continuity equation

$$\begin{aligned} \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} &= mcx^{m-1} \frac{df}{d\eta} + \frac{m-1}{2} c \left(\frac{c}{\vartheta}\right)^{\frac{1}{2}} x^{\frac{3m-3}{2}} y \frac{d^2 f}{d\eta^2} - mcx^{m-1} \frac{df}{d\eta} \\ &- \frac{m-1}{2} cy \left(\frac{c}{\vartheta}\right)^{\frac{1}{2}} x^{\frac{3m-3}{2}} \frac{d^2 f}{d\eta^2} = 0 \end{aligned} \quad (8)$$

Momentum equation

$$(1 + R) \frac{d^3 f}{d\eta^3} + R \frac{dg}{d\eta} + M \left(1 - \frac{df}{d\eta}\right) - m \left(\frac{df}{d\eta}\right)^2 + \frac{m+1}{2} f \frac{d^2 f}{d\eta^2} + m = 0 \quad (9)$$

Microrotation equation

$$\left(1 + \frac{1}{2} R\right) \frac{d^2 g}{d\eta^2} - R \left(2g + \frac{d^2 f}{d\eta^2}\right) - \frac{3m-1}{2} \frac{df}{d\eta} g + \frac{m+1}{2} \frac{dg}{d\eta} f = 0 \quad (10)$$

Energy equation

$$\frac{d^2 \Theta}{d\eta^2} + \text{Pr} \left(N_b \frac{d\Theta}{d\eta} \frac{d\Phi}{d\eta} + N_t \left(\frac{d\Theta}{d\eta}\right)^2 + \frac{m+1}{2} \frac{d\Theta}{d\eta} f \right) = 0 \quad (11)$$

Concentration equation

$$\frac{d^2\Phi}{d\eta^2} + \frac{N_t}{N_b} \frac{d^2\Theta}{d\eta^2} - k^* Sc \Phi + \frac{m+1}{2} Sc f \frac{d\Phi}{d\eta} = 0 \quad (12)$$

The boundary conditions are non-dimensionalized into:

$$\eta = 0: f = 0, \quad \frac{df}{d\eta} = 0, \quad g = -\frac{1}{2} \frac{d^2f}{d\eta^2}, \quad \Theta = 1, \quad \frac{d\Phi}{d\eta} + \frac{N_t}{N_b} \frac{d\Theta}{d\eta} = 0 \quad (13)$$

$$\eta = \infty: \frac{df}{d\eta} = 1, \quad g \rightarrow 0, \quad \Theta \rightarrow 0, \quad \Phi \rightarrow 0 \quad (14)$$

and the dimensionless parameters are defined as

$$R = \frac{s}{\rho\vartheta}, \quad M = \frac{\sigma B^2}{\rho c x^{m-1}}, \quad \frac{1}{Pr} = \frac{\alpha}{\vartheta}, \quad N_b = \frac{\tau D_B}{\vartheta}, \quad N_t = \tau \frac{D_T}{T_\infty} \frac{\Delta T}{\vartheta},$$

$$Sc = \frac{\vartheta}{D_B}, \quad k^* = \frac{k}{c}. \quad (15)$$

Numerical Solution

The resulting non-dimensionalized equations are solved using the Fourth Order Runge-Kutta technique coupled with the shooting technique which converts the boundary value problems to initial value problem then subjected to the bvp5c solver in MATLAB

Letting

$$x_1 = f, x_2 = f', x_3 = f'', x_4 = g, x_5 = g', x_6 = \Theta, x_7 = \Theta', x_8 = \Phi, x_9 = \Phi' \quad (16)$$

So, we have

$$x'_1 = x_2$$

$$x'_2 = x_3$$

$$\begin{aligned}
 x_3' &= -\frac{1}{(1+R)} \left(R x_5 + M(1-x_2) - m x_2^2 + \frac{m+1}{2} x_1 x_3 + m \right) \\
 x_4' &= x_5 \\
 x_5' &= -\frac{1}{\left(1 + \frac{1}{2}R\right)} \left(-R(2x_4 + x_3) - \frac{3m-1}{2} x_2 x_4 + \frac{m+1}{2} x_1 x_5 \right) \\
 x_6' &= x_7 \\
 x_7' &= -\text{Pr} \left(N_b x_7 x_9 + N_t x_7^2 + \frac{m+1}{2} x_7 x_1 \right) \\
 x_8' &= x_9 \\
 x_9' &= -\left(\frac{N_t}{N_b} x_7' - k^* S c x_8 + \frac{m+1}{2} S c x_1 x_9 \right)
 \end{aligned} \tag{17}$$

with the initial and boundary conditions

$$\begin{aligned}
 x_1(0) &= 0, \quad x_2(0) = 0, \quad x_4(0) = -\frac{1}{2} x_3(0), \quad x_6(0) = 1, \\
 x_9(0) + \frac{N_t}{N_b} x_7 &= 0. \\
 x_2(\infty) &\rightarrow 1, \quad x_4(\infty) \rightarrow 0, \quad x_6(\infty) \rightarrow 0, \quad x_8(\infty) \rightarrow 0.
 \end{aligned} \tag{18}$$

4.0 Results and Discussion

Numerical analysis was done for several and different values of the investigated parameters, this assisted in giving the physical insight of the investigated problem.

4.1 Results and Discussion on steady flow

The interactions between various physical parameters and the flow velocity, microrotation, temperature and nanoparticle concentration profiles are analysed by

solving the dimensionless equations (9) to (12) with the associated condition (13) and (14). The results are illustrated as graphs and the discussion are as follows.

4.1.1 Effect of magnetic parameter on velocity profile, microrotation and temperature

Figures 2 – 3 show that an increase in the magnetic parameter reduces the flow velocity, microrotation, and temperature while the concentration produces dual response.

The reduction in velocity due to the increased magnetic field strength shown in Figure 2 can be traced to the influence of Lorentz force. The imposition of a transverse magnetic field induces a Lorentz force that modifies the velocity distribution in the boundary layer. The graph shows that the magnetic parameter M introduces practical control over fluid dynamics of the flow by reducing both primary and secondary velocities. This reduction occurs due to the Lorentz force generated by the interaction between the magnetic field and the electrically conductive fluid, acting as a resistive force that slows down the fluid's motion. As M increases, this resistive force becomes stronger, countering fluid movement, lowering kinetic energy, and reducing flow speeds. These results concur with the findings of Ishak et al (2008) and that of Falkner and Skan (1931) as described in the literature.

The reduced momentum also results in a thinner thermal boundary layer, causing a drop in temperature (see Figure 3) and suppressing the microrotation component as shown in

Figure 4 A stronger magnetic field results in a decrease in flow temperature. This reduction in temperature can be attributed to the Lorentz force acting as a resistive influence on the fluid flow, reducing kinetic energy and thus diminishing the fluid's ability to transport thermal energy efficiently. Consequently, the fluid experiences localized cooling as its convective heat transfer capacity decreases. These results concur with the findings of Rahman and Sattar (2012).

Figure 5 demonstrates that an increase in magnetic field strength reduces the concentration of reactive species within the flow. This effect likely arises because the slower flow, induced by the magnetic resistance, limits the dispersion and mixing of solutes. As a result, the concentration distribution is suppressed, leading to a lower overall concentration gradient within the fluid results that marry with the work of Zulkifli *et al* (2020) in their study of magnetohydrodynamics micropolar nanofluid flow over a wedge with chemical reaction. The concentration increases near the boundary layer but reduces in the free stream as shown in Figure 5.

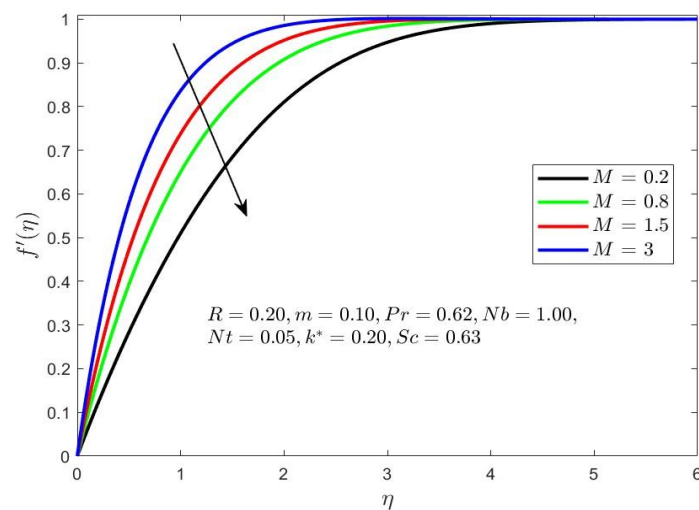


Figure 2: Effect of magnetic field strength on velocity profile

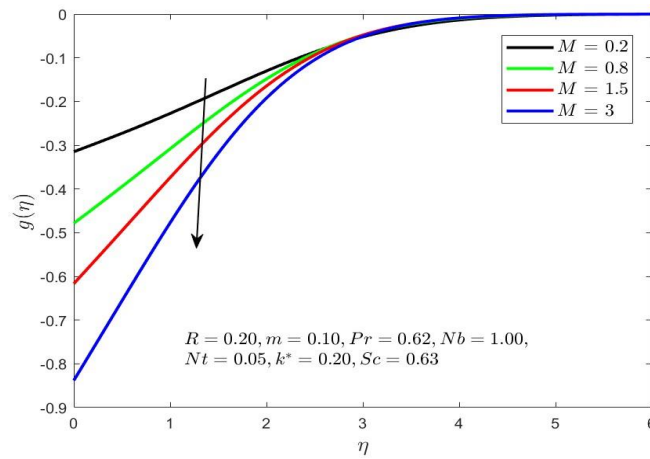


Figure 3: Effect of magnetic field on microrotation profile

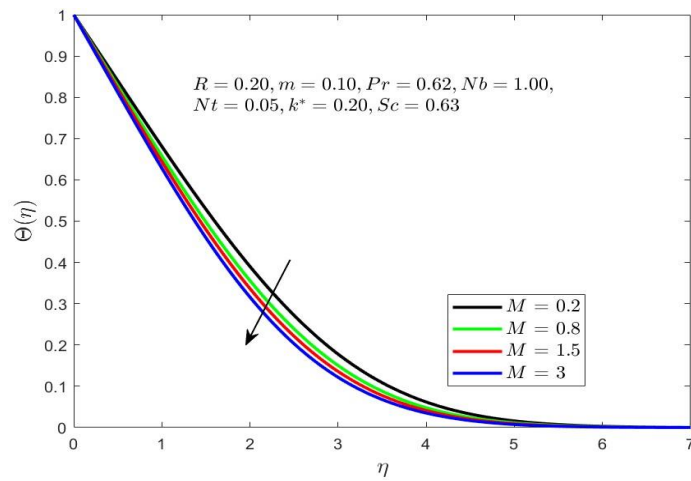


Figure 4: Effect of magnetic field on temperature profile

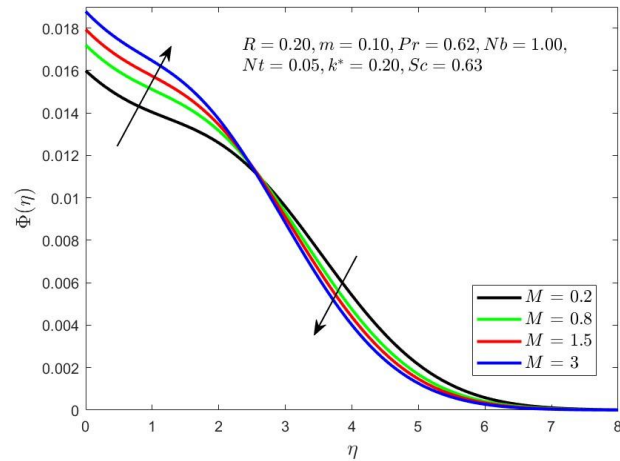


Figure 5: Effect of magnetic field on nanoparticle concentration profile

4.1.2 Effect of wedge parameter on the fluid flow

Figures 6–9 illustrate the responses of the flow to changes in the wedge shape parameter. With increasing values of the wedge shape parameter m , which characterizes the nature of the pressure gradient along the wedge, the velocity and microrotation profiles increased significantly as shown in Figures 6 and 7. This is due to the favorable pressure gradient that arises from wedge angles, which accelerates the boundary layer flow and intensifies microstructural activity. Correspondingly, the temperature profile decreased as shown in Figure (8), which is expected due to the reduced thermal boundary layer thickness associated with accelerated flow. The concentration profile Φ exhibited non-monotonic behaviour; it initially increased with m but eventually started to decline. This suggests a competition between enhanced convective transport at lower values of m and reduced nanoparticle diffusion at higher values, possibly due to boundary layer thinning and thermal effects.

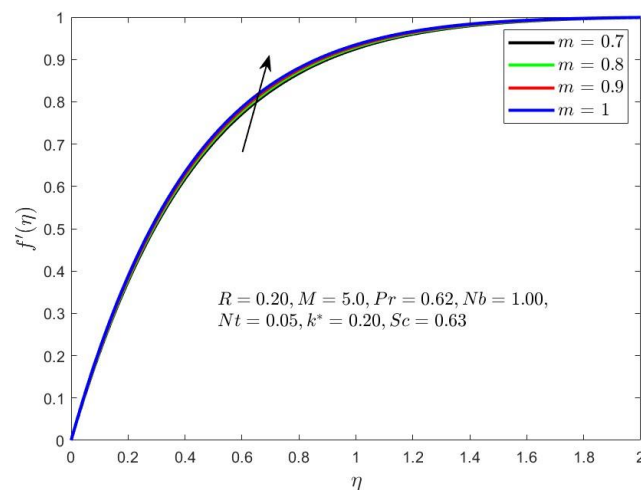


Figure 6: Effect of wedge shape parameter on velocity profile

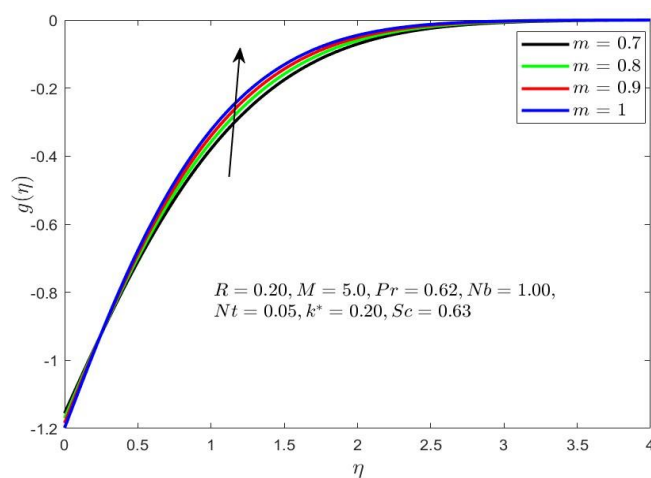


Figure 7: Effect of wedge shape parameter on microrotation profile

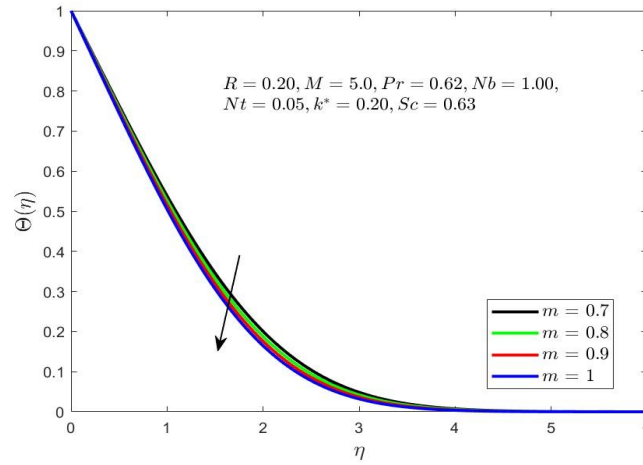


Figure 8: Effect of wedge shape parameter on temperature profile

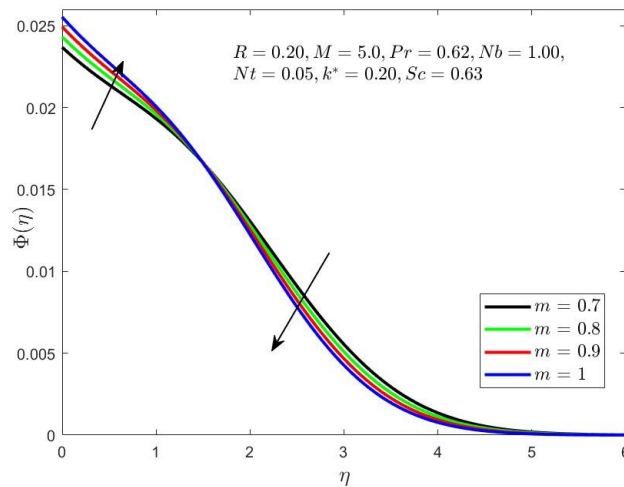


Figure 9: Effect of wedge shape parameter on nanoparticle concentration profile

4.1.3 Effect of microparameter and effect of the inertia on velocity profile

The micropolar parameter R reflects the significance of microstructure and spin inertia effects in the fluid and its impacts on the flow are illustrated in Figures 10 – 13. As R increased, both the velocity and concentration profiles decreased (see Figures 10 and 13). The suppression of velocity is a direct consequence of the internal resistance introduced by microelements in the fluid, which tends to dampen the overall flow. The

microrotation h , on the other hand, increased due to the stronger influence of microstructural dynamics. The thermal profile θ also rose with increasing R , indicating that the reduction in convective heat transfer due to lower velocity allowed for heat accumulation within the fluid domain. This reduction can be attributed to the increased rotational viscosity within the micropolar fluid, which imposes additional resistance against the fluid's translational motion. these results concur with the findings of Alkavan *et al* (2012) in their experimental investigation on the convective heat transfer of nanofluid flow inside vertical helically coiled tube under uniform wall temperature. As a result, the fluid particles experience a dampening effect, slowing down the flow in both primary and secondary directions.

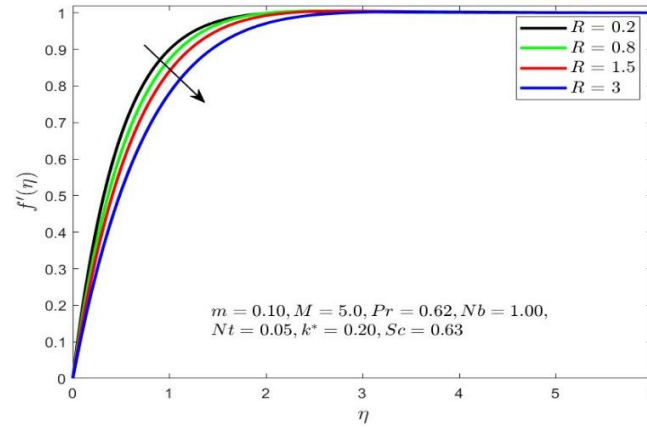


Figure 10: Effect of micropolar parameter on velocity profile

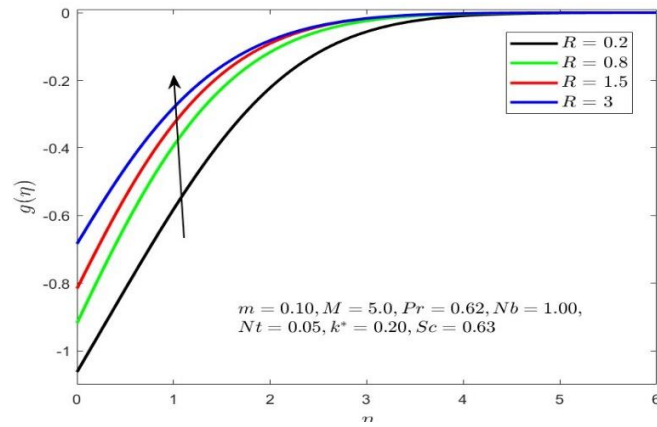


Figure 11: Effect of micropolar parameter on microrotation profile

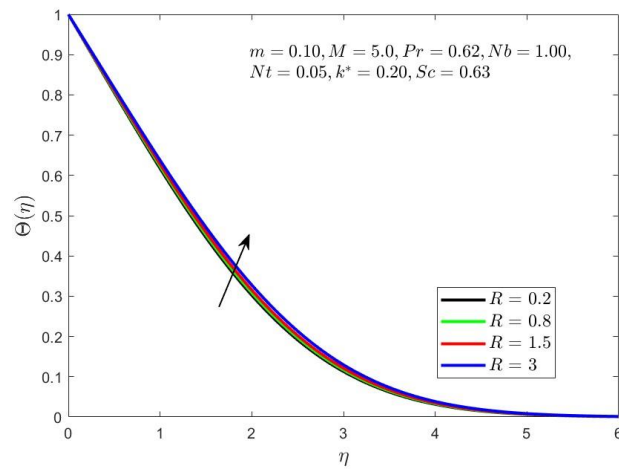


Figure 12: Effect of micropolar parameter on temperature profile

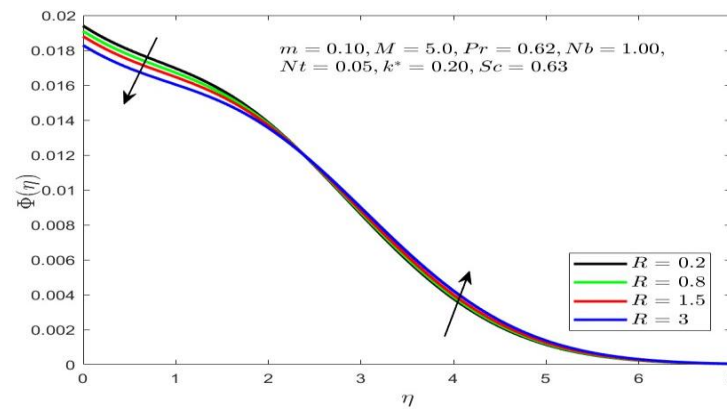


Figure 13: Effect of micropolar parameter on nanoparticle concentration profile

4.1.4: Effect of the skin friction, heat transfer rate and Sherwood number to the wedge parameter and magnetic field parameter

Figures 14 – 16 show the responses of the skin friction, heat transfer rate and Sherwood number to the wedge parameter and magnetic field parameter. Figure 14 shows the skin friction coefficient as it responds to the magnetic field and wedge parameter m .

The skin friction attains the highest value ($Re^{\frac{1}{2}}C_f = -4.61571$) when m and M are the least (in this case, $m = M = 0.1$). Furthermore, as observed in Figure 14, the wedge parameter increases the skin friction while the magnetic field counters the effect of wedge parameter on the skin friction. Figure 15 and 16 show the response of the heat transfer rate and Sherwood number to both wedge parameter and magnetic field parameter. The heat transfer and Sherwood number are maximum at the highest wedge parameter irrespective of the value of the magnetic field.

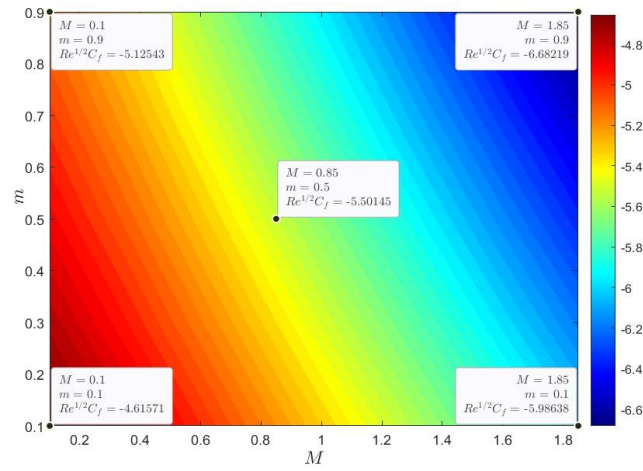


Figure 14: Response of skin friction to both m and M

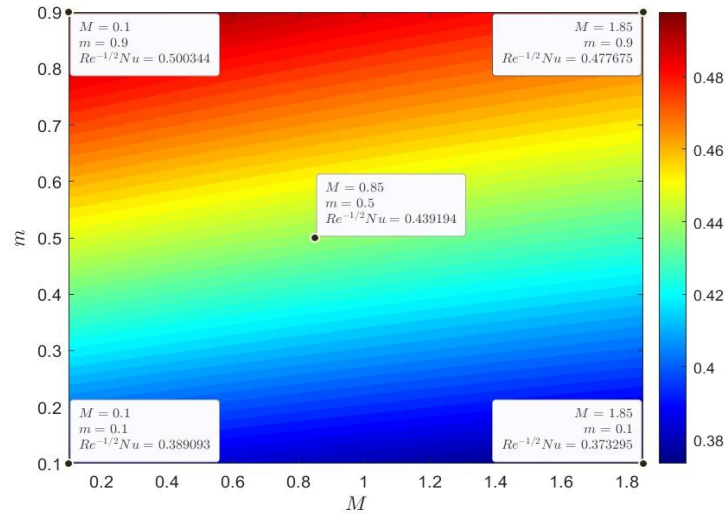


Figure 15: Response of heat transfer to both m and M

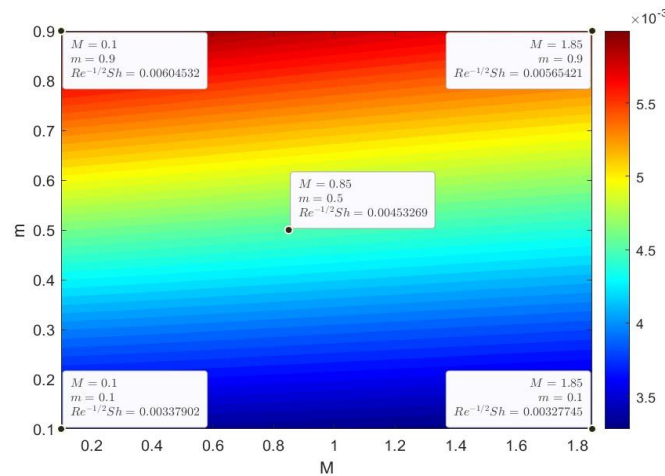


Figure 16: Response of mass transfer to both m and M

Conclusion

This study analyzed the steady flow of a micropolar fluids under the influence of a magnetic field, emphasizing velocity, temperature, and concentration distributions. The governing equations were formulated to account for the effects of magnetic fields, micropolar fluid properties, reaction rates, and the Schmidt number. These equations were nondimensionalized for simplification and solved numerically using the bvp5c solver in MATLAB.

Key findings from the study are as follows:

1. **Magnetic Field Influence:** An increase in the magnetic parameter reduced both primary and secondary velocities due to the Lorentz force. This decrease in velocity lowered convective heat and mass transfer efficiency, resulting in reduced temperature and solute dispersion. This indicates that the magnetic parameter can be employed as a control variable in regulating fluid flow and transport properties.
2. **Micropolar Fluid Properties:** Higher values of the micropolar parameter led to reduced velocities in both primary and secondary directions, attributed to enhanced rotational viscosity. Additionally, increased micropolar effects

raised the temperature and solute concentration, highlighting the role of micro-rotational effects in modulating energy and mass transfer.

3. Micropolar nanofluid concentration: An increase in the reaction rate parameter reduced temperature and solute concentration due to endothermic reactions and accelerated consumption of reactants. These results underscore the importance of reaction rate control in processes requiring thermal regulation and efficient reactant utilization.
4. Wedge angle parameter boosts the skin friction, fluid velocity and enhances heat and mass transfer regardless of the magnetic field strength.

The numerical approach demonstrated the applicability of MATLAB's `bvp5c` solver for solving boundary value problems associated with micropolar fluid dynamics. The findings provide a theoretical basis for optimizing systems involving reactive micropolar fluids, such as chemical reactors, cooling systems, and other industrial processes.

5.1 RECOMMENDATION

Future studies could extend this analysis to incorporate three-dimensional flows, time-dependent boundary conditions, or turbulent flow regimes to enhance the understanding of reactive micropolar fluids under varied conditions.

Further research can be done to include the effects of the nanoparticle properties on the flow of the fluid.

REFERENCES

- Acharya, N. et.al (2016), Ramification of variable thickness on MHD TiO_2 and Ag nanofluid flow over a stretching sheet using NDM, Eur Phys. plus 131, pg. 1-16.
- Abid FL, et al., Unsteady boundary layer MHD free convection flow in a porous medium with constant mass diffusion and Newtonian heating, The European Physical Journal Plus, 129 (2014), pp. 1-16.
- Ahmad, G. (1976), Self-similar solution of incompressible micropolar boundary layer flow over a semi-infinite plate, Int. J. Eng Sci.14, 639-646.
- Akhavan -Behabadi MA et al (2012), Experimental investigation on the convective heat transfer of nanofluid flow inside vertical helically coiled tubes under uniform wall temperature condition, International Communication in Heat and Mass transfer, vol 39, No.4 pp 556-564.
- Aurangzaib, et al., (2013). Unsteady MHD mixed convection flow with heat and mass transfer over a vertical plate in a micropolar fluid-saturated porous medium, Journal of Applied Science and Engineering, pp. 141-150
- Ayano, M.S. et.al (2018), MHD Mixed convection micropolar fluid flow through a rectangular duct, Math.Probl. Eng. 1-8.
- Bala Anki Reddy (2016), Magnetohydrodynamics flow of a Casson fluid over an Exponentially inclined permeable stretching surface with thermal radiation and chemical reaction, Ain ShamsEng.J.(7) 593-602.

Bakier,A.Y (2011), Natural convection heat and mass transfer in a micropolar fluid-saturated non-Darcy porous regime with radiation and thermophoresis effect. Thermal Science (15), 317-326.

Chamkha, A.J., Jaradat,M.,Pop., I(2003),M Three dimensional micropolar flow due to a stretching flat surface, Int. J. Fluid Mech Res (30) , 357-366 .

Chaudhary, R. C., Jain, P., Unsteady free convection boundary layer flow past an impulsively started vertical surface with Newtonian heating, Romanian Journal of Physics, 51 (2006), pp. 911925.

Damseh, R. A., et al. (1990), Numerical natural convection heat transfer of micropolar fluid over a vertical surface with constant heat flux, Turkish Journal of Engineering of pure and applied mathematics (21), 567-573.

Damseh, R. A., et al.,(2007).Unsteady natural convection heat transfer of micropolar fluid over a vertical surface with constant heat flux, Turkish Journal of Engineering and Environmental Sciences, (31), pp. 225-233.

D.D. Papailiou,P.S.Lykoudis,Magneto-fluid-Mechanic laminar natural convection an experiment. Int J Heat Mass Transfer,11. (1968) pg 138-591.

G.Makansa ,O.D. Makinde, P.Sibanda, Natural convection of viscoelastic fluid from a cone embedded in a porous medium with viscous dissipation, Mathematical problem in Engineering, 20`3,934712.

Erigen, A. C. (1965), Theory of micropolar fluids, Journal of Applied Mathematics and Mechanics (16),1- 18.

- Erigen, A. C., (1972). Theory of thermos-micropolar fluids, Journal of Mathematical Analysis and Applications (38), 480-496.
- El-Dawy HA (2014). Mixed convection over vertical plate emended in a porous medium saturated with a nanofluid, J Nanofluid (3), 1-11.
- Falkner VM and Skan (1931), Some approximate solutions of the boundary-layer equations, philosophical magazine, Vol 12 865-896.
- Jie Liclement K. (2010) Entropy generation analysis for nanofluid flow in a microchannels, J Heat Trans. (132)122401-122408.
- Kumar et al (2001). Mixed convection flow over a vertical wedge embedded in a highly porous medium. Heat and Mass transfer, Vol.37(2), 139-146.
- Kumar et.al (2018), Finite Element Analysis of MHD flow of micropolar fluid over a Shrinking sheet with a convective surface boundary condition, J. Eng Thermophys. (27),202-220.
- Mebine, P., Adigio, E. M.(2009), Unsteady free convection flow with thermal radiation past a vertical porous plate with Newtonian heating, Turkish Journal of Physics, 33, pp. 109-119.
- Rajagopal KR et al (1983). A note on the falkner-Skan flow of a non-Newtonian fluid. International journal of no-linear mechanics.Vol. 18(4),313-320.
- Rahman M.M., Sultana,Y (2008),Radiative heat transfer flow of micropolar fluid with variable heat flux in a porous medium, Nonlinear Analysis, modelling and control (13),71-87.

Rahma et al. (2012), Local similarity solution for unsteady 2D-forced convective flow heat and mass transfer flow along a wedge with thermophoresis. International journal of Applied Mathematics and mechanics, Vol 8, 86-112.

Rahman MM and Sattar MA (2014), Non forced convective hydromagnetic flow of unsteady biomagnetic fluid over a wedge with convective surface condition. In chaos, Complexity and leadership 2012, pp 423-452. Springer, Dordrecht.

M. K.Chowdhury et al (2012). Thermophoresis particle deposition on unsteady two-dimensional forced convective heat and mass transfer flow along a wedge with variable viscosity and variable Prandtl number, Int. Commun. Heat Mass Transfer, Vol. 39, pp. 541-550.

Reddy M.G (2012), Magnetohydrodynamics and radiation effects on unsteady convection flow of micropolar fluid past a vertical porous plate with variable wall heat flux, ISRN thermodynamics,1-8.

Scatter MA (2011), Local similarity transformation for the unsteady 2D-hydromagnetic boundary layer equations of a flow past a wedge. International journal of Applied Mathematics and Mechanics, Vol 7(1), 47-51.

W.N. Mutuke-Njane, O.D. Makinde (2014), MHD nanofluid flow over a permeable vertical plate with convective heating, Journal of Computational and Theoretical Nanoscience, 11(3) ,667-675.

Yih KA (1999). MHD forced convection flow adjacent to a non-isothermal wedge. International communication in Heat and Mass transfer.

Zaid A.Haq RU, Sheikholeslain M, and Khan U(2019), Physica Scripta 950335005.

Zeshan Zulifqar et al(2023).An approximate closed form solution for mass transfer flow due to a rotating rough and porous disk. Arabian journal for science and Engineering 49(1).

Zeshan Zulifqar et al(2025). Approximate closed-form solution of the flow and heat transfer over a static wedge. Journal of Applied mathematics and mechanics.

Z. zhang.j. Wang (2007), Exact self-similar solution of the magnetohydrodynamics boundary layer system for power-law fluids.Z. Angew Math phys (58), 805-817.

Zulkifli et.al (2020), magnetohydrodynamic micropolar nanofluid flow over a wedge with chemical reaction.

COMPETING INTERESTS DISCLAIMER:

Authors have declared that they have no known competing financial interests OR non-financial interests OR personal relationships that could have appeared to influence the work reported in this paper.

